



Proudly Australian Built




Features

- * Turning capacity 1000kg
- * Tilt/rotate control for best weld position
- * Pipe diameter range 50 – 200mm
- * Variable speed range 0 – 3rpm
- * Recessed digital readout
- * All welded construction
- * Solid 150mm. rubber wheels
- * Ideal for s/steel piping
- * Inbuilt rotary brass earth
- * Recessed controls
- * Optional foot switch SW-10F
- * Optional 150mm chuck for 50-75mm pipe as shown
- * **Electrical compliance to AS/NZS 3000-2009**

Product Information

SMITHWELD ENTERPRISES PTY LTD

PIPE POSITIONER/ROTATOR 50 – 200mm diameter Model SW-200RP-2

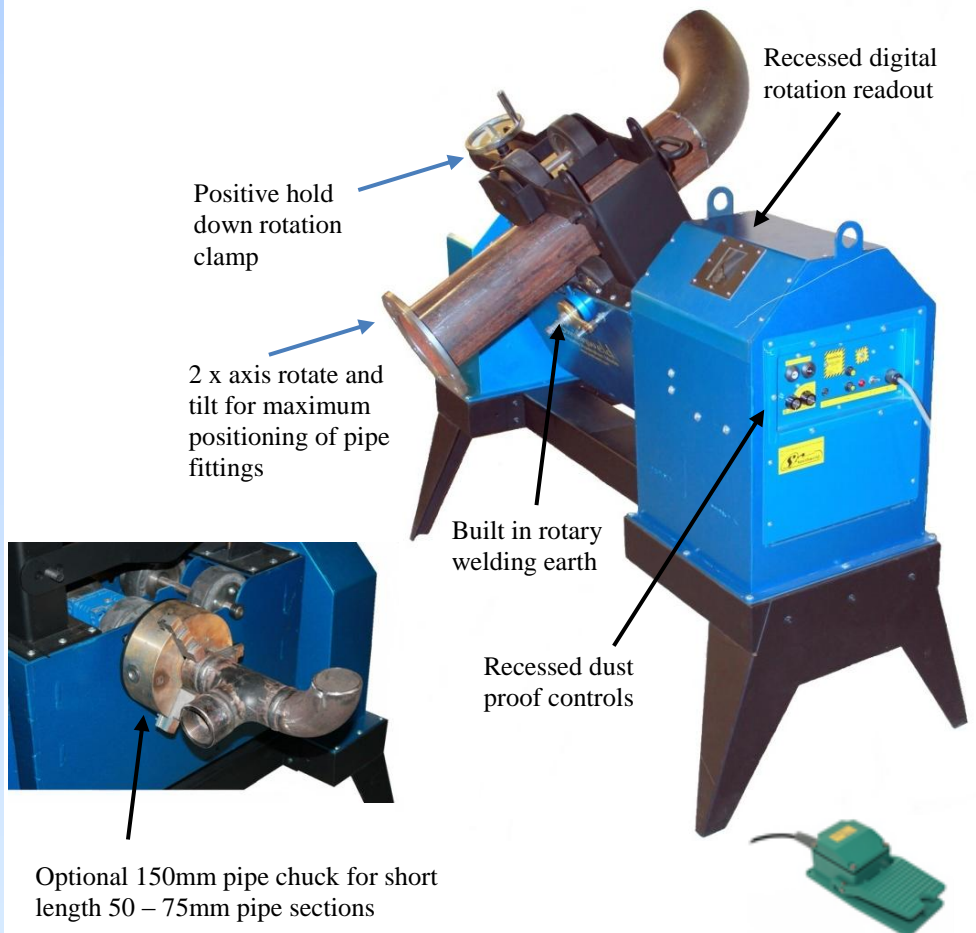

Optional 150mm pipe chuck for short length 50 – 75mm pipe sections

Optional extra
Foot control
Model SW-10F

Specifications

- * load Capacity: 500kg.
- * Voltage: 220-240V single phase

External Dimensions

- Length: 1550mm
- Width: 700mm
- Height: 1300mm

Net Weight: (approx) 200kg

**Smithweld Enterprises
Pty Ltd**

227 Bank Street
Welshpool WA 6106

Tel: 61 8 9470 6670

Email: sales@smithweld.com

Australian designed and built

