



**Proudly Australian Built**



## Technical Features

- \* Turning capacity 25,000kg. with min of 3 idler sets
- \* Pipe/Vessel diameter range 0.3 – 3 metre. (depending on frame)
- \* Variable speed range 100 – 600mm.per minute surface speed
- \* Inverter control, with in-built safety features.
- \* All welded construction
- \* Solid natural rubber wheels 525 x 450mm main drive 525 x 300mm idler set
- \* Precision aligned frame for No creep on rotation
- \* Quality hand pendant with safety cut off fitted as standard
- \* Ample lifting eyes and fork lifting slots provided
- \*\* 6 Ton Idler SW-6TRI-4-2500-D525 twin wheel set

**Check total load capacity when choosing the number of idlers required**

- \* Electrical compliance to AS/NZS 3000-2009

**Smithweld Enterprises Pty Ltd**

227 Bank Street  
Welshpool WA 6106

Tel: 61 8 9470 6670


Email: sales@smithweld.com

# Product Information

SMITHWELD ENTERPRISES PTY LTD

## **PIPE/VESSEL ROTATOR 25,000kg Capacity**

### **Model SW-25TR-300-2000-T525**

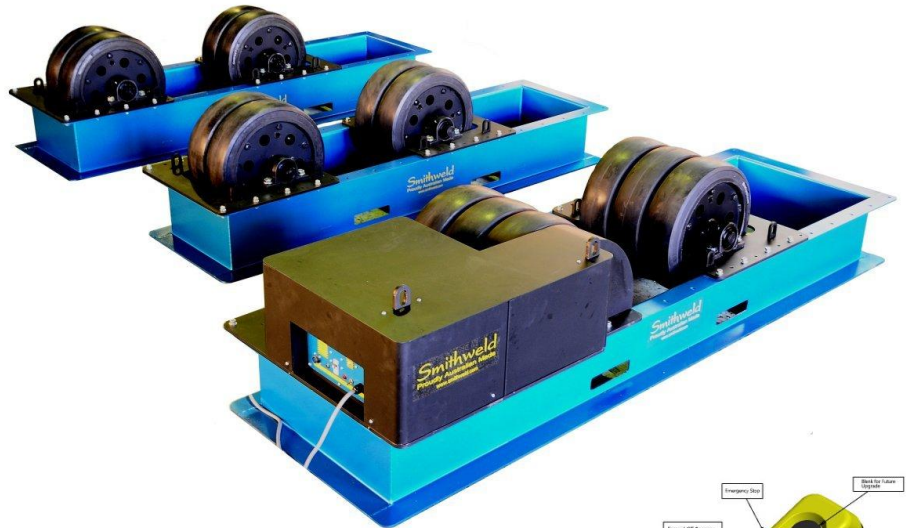

## Specifications

|                      |                             |
|----------------------|-----------------------------|
| Capacity:            | 25,000 kg                   |
| Voltage:             | 240V/1ph/50Hz               |
| Speed range:         | 100 – 600mm                 |
| Overload protection: | current limiting protection |

## External Dimensions

|                    |                 |
|--------------------|-----------------|
| Main frame length: | 1.8 – 3.0 meter |
| Width:             | 860mm           |
| Height:            | 630mm           |

|             |                                 |
|-------------|---------------------------------|
| Net Weight: | 650kg main drive<br>350kg idler |
|-------------|---------------------------------|

### Optional

Foot control  
Model SW-10F  
with 10 metres  
of rubber cable

